




Tutorial: How To Sew An Angled Colorblock Blouse

Description

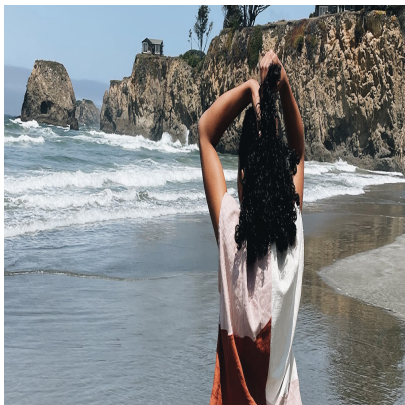

FS Charlie Blouse made with FS Desert Sand, Kenya FS Signature Finish, Blea

Itâs official. I am incapable of sewing a basic. I *had* plans to create a nice *simple* [Charlie Blouse](#), but...here we are with this angled color-blocked beautiful madness. What should have been a nice quick sew turned my project with three pattern pieces into nine, lots of confusion about what goes where, and twice the cutting time.



FS Charlie Blouse made with FS Desert Sand, Kenya FS Signature Finish, Blea

I have no regrets.Â

[The Charlie Blouse](#) is a tasteful top with fold-over lapels on the front and back, and a mandarin-style collar with a button. It features drop shoulders in a design that makes it almost âsleevelessâ since there are no attached sleeves, as well as bias-bound armholes. Itâs a beautiful pattern, and it lends well to a hack for some extra flair!



FS Charlie Blouse made with FS Desert Sand, Kenya FS Signature Finish, Bleached

How to Make Your Own Colourblocked Top

1. Plan out the angled design you like, and choose how many colors to use. This project is perfect (!) for using up scraps.
2. Map out the design of the colorblocking and which colors will connect. My front and back designs are different, so I ended up having four front pieces and four back ones. I like the effect of one neutral with two colors.
3. Trace off mirrored front and back pieces (so that there is a right and left for each one), and draw your chosen angles across these pieces. I did all of mine at a 60-degree angle for consistency, but you could do whatever feels right!
4. Add seam allowance to these new pieces and label them carefully! Your pattern pieces are now ready.
5. After cutting out the fabric, we're going to sew each front right, front left, back right, and back left piece together carefully so that you have whole pieces to continue on with the pattern instructions.
6. To have the sides of each piece line up neatly, you need to sew the color blocked pieces together with an offset that is the same width as your seam allowance. In my case, I offset each piece by my 4/8ths of an inch seam allowance. Test (!) before you sew by pinning each seam, finger pressing, and folding the pieces open before you sew the seam. This will save you a lot of time in unpicking pieces that are misaligned! Be cautious not to overwork the angled edge of these pieces, as they are on the bias, so will be prone to stretching out.
7. Sew the [Charlie Blouse](#) as instructions layout and carry on!

I sewed up the suggested size for my measurements, a size four. I cropped 3.5 in/9cm off the suggested length for the shirt.

CATEGORY

1. SEWING PROJECTS
2. TUTORIALS

Category

1. SEWING PROJECTS
2. TUTORIALS

Date Created

August 24, 2023

Author

ella-clausen